

# Insulated Roofing Roof Panel Configuration



## Optional Insulation Cutback Areas

Apollo insulated panels can be manufactured with the insulation cut back from the front edge, rear edge, or both edges to create uninsulated overhang areas for guttering or other structural requirements specific to your project.

**Standard:** If cutbacks are not specified, the insulation will be flush with both the front and rear edges of the steel sheeting.

**Custom:** Specify front and/or rear cutback measurements to accommodate your project's gutter and structural needs.

### Dimensions:



Cutbacks of:

- No Cut Back
- 60mm (regular)
- 75mm
- 100mm
- 125mm
- 150mm
- 175mm
- 200mm
- 225mm
- 250mm (max)

## Direction of installation looking at the existing structure

Right lap or left lap panels are selected based on your installation direction. The installation direction is determined by the existing structure and site conditions.

### Right to Left requires Right Hand Overlay

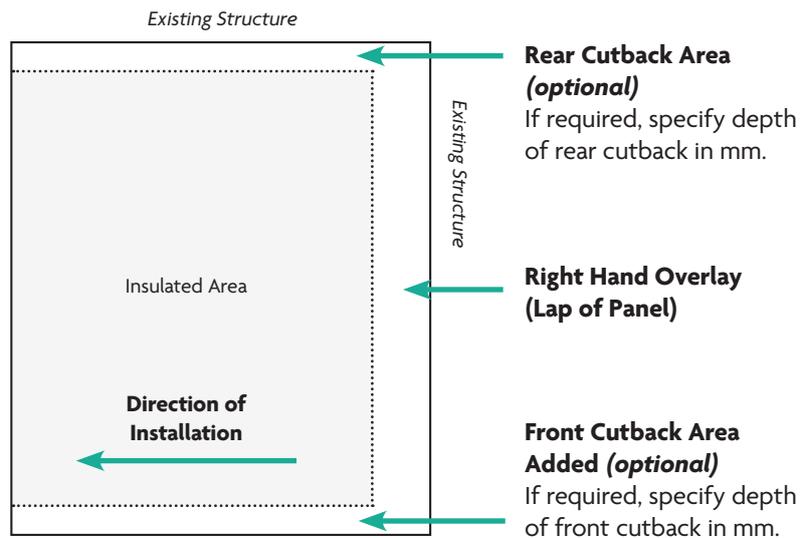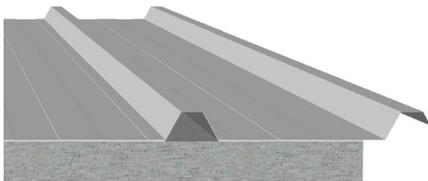

### Left to Right requires Left Hand Overlay

